

# Model Predictive Control for Renewable Energy Systems – Sample exam

Dr. Lilli Frison and Jochem De Schutter, IMTEK, Universität Freiburg

Page	0	1	2	3	4	5	6	7	8	9	Sum
Points on page (max)	4	9	9	6	6	4	4	0	0	0	42
Points obtained											
Intermediate sum											
Intermediate sum (max)	4	13	22	28	34	38	42	42	42	42	

Mark:

Exam inspected on:

Signature of examiner:

Surname:

First Name:

Matriculation number:

Subject:

Programme: Bachelor ☐ Master ☐ Lehramt ☐ others ☐

Signature:

Please fill in your name above. For the multiple choice questions, which give exactly one point, tick exactly one box for the right answer. For the text questions, give a short formula or text answer just below the question in the space provided, and, if necessary, write on the **backpage of the same sheet** where the question appears, and add a comment “see backpage”. Do not add extra pages (for fast correction, all pages will be separated for parallelization). The exam is a closed book exam, i.e. no books or other material are allowed besides 1 sheet (with 2 pages) of notes and a non-programmable calculator. Some legal comments are found in a footnote<sup>1</sup>.

1. Name two advantages and two limitations of using an MPC controller instead of traditional controller.

2

2. Which of the following functions  $f(x)$  is NOT convex ( $c$  and  $A$  are of appropriate dimensions and fixed)?

(a) <input type="checkbox"/> $\ Ax\ _2^2 + \log(c^\top x)$	(b) <input type="checkbox"/> $\ Ax\ _2^2 + \exp(c^\top x)$
(c) <input type="checkbox"/> $c^\top x + \exp(\ Ax\ _2^2)$	(d) <input type="checkbox"/> $-c^\top x + \ Ax\ _2^2$

1

3. A point in the feasible set of an NLP that satisfies the KKT optimality conditions is

(a) <input type="checkbox"/> the global minimum	(b) <input type="checkbox"/> a local minimum
(c) <input type="checkbox"/> a boundary point	(d) <input type="checkbox"/> a candidate for local minimum

1

<sup>1</sup>WITHDRAWING FROM AN EXAMINATION: In case of illness, you must supply proof of your illness by submitting a medical report to the Examinations Office. Please note that the medical examination must be done at the latest on the same day of the missed exam. In case of illness while writing the exam please contact the supervisory staff, inform them about your illness and immediately see your doctor. The medical certificate must be submitted latest 3 days after the medical examination. More informations: [http://www.tf.uni-freiburg.de/studies/exams/withdrawing\\_exam.html](http://www.tf.uni-freiburg.de/studies/exams/withdrawing_exam.html)

CHEATING/DISTURBING IN EXAMINATIONS: A student who disrupts the orderly proceedings of an examination will be excluded from the remainder of the exam by the respective examiners or invigilators. In such a case, the written exam of the student in question will be graded as 'nicht bestanden' (5.0, fail) on the grounds of cheating. In severe cases, the Board of Examiners will exclude the student from further examinations.

4. Apply the full step Newton method for optimization to the scalar optimization problem  $\min_{x \in \mathbb{R}} f(x)$  with  $f(x) = x + x^6$ . Given the current iterate  $x_k$ , which exact formula determines the next iterate  $x_{k+1}$ ?

(a) <input type="checkbox"/> $x_k - \frac{1+6x_k^5}{30x_k^4}$	(b) <input type="checkbox"/> $x_k - \frac{x+x_k^6}{1+6x_k^5}$	1	
(c) <input type="checkbox"/> $x_k + \frac{1+6x_k^5}{30x_k^4}$	(d) <input type="checkbox"/> $x_k + \frac{x+x_k^6}{1+6x_k^5}$		

5. A system is described by the differential equation  $\log(a)\dot{y}(t) = e^{-b} \cdot u(t)$ , where  $a$  and  $b$  are strictly positive constant parameters. Is the system linear and/or time invariant?

(a) <input type="checkbox"/> linear and time invariant	(b) <input type="checkbox"/> only time invariant	1	
(c) <input type="checkbox"/> only linear	(d) <input type="checkbox"/> neither of both		


6. A hanging pendulum subjected to an external force is described by the linearized ODE  $I\ddot{\theta} = -mgL\theta - c\dot{\theta}L + FL$ . Take  $x = [\theta \quad \dot{\theta}]^\top$  as the state and  $u = F$  as the input. Write the system in the form  $\dot{x} = Ax + Bu$ . Specify  $A$  and  $B$ .

(a) <input type="checkbox"/> $A = \begin{bmatrix} 0 & 1 \\ \frac{mgL}{I} & \frac{cL}{I} \end{bmatrix}, B = \begin{bmatrix} 0 \\ \frac{L}{I} \end{bmatrix}$	(b) <input type="checkbox"/> $A = \begin{bmatrix} \frac{mgL}{I} & \frac{cL}{I} \\ 0 & 1 \end{bmatrix}, B = \begin{bmatrix} L \\ 0 \end{bmatrix}$	1	
(c) <input type="checkbox"/> $A = \begin{bmatrix} 0 & 1 \\ -\frac{mgL}{I} & -\frac{cL}{I} \end{bmatrix}, B = \begin{bmatrix} 0 \\ \frac{L}{I} \end{bmatrix}$	(d) <input type="checkbox"/> $A = \begin{bmatrix} 0 & 1 \\ -mgL & -cL \end{bmatrix}, B = \begin{bmatrix} 0 \\ L \end{bmatrix}$		

7. The nonlinear system  $\dot{y}(t) = \sin(u(t)) + \cos(y(t))$  should be linearized at the steady state  $u_{ss} = 0, y_{ss} = \frac{\pi}{2}$ . What is the differential equation of the linearized system as a function of  $\Delta u(t) = u(t) - u_{ss}$  und  $\Delta y(t) = y(t) - y_{ss}$ ?

(a) <input type="checkbox"/> $\Delta \dot{y}(t) = \Delta u(t) - \Delta y(t)$	(b) <input type="checkbox"/> $\Delta \dot{y}(t) = \Delta u(t)$	2	
(c) <input type="checkbox"/> $\Delta \dot{y}(t) = \Delta y(t)$	(d) <input type="checkbox"/> $\Delta \dot{y}(t) = \Delta u(t) + \Delta y(t)$		

8. A variable-speed wind turbine is characterized by the following limitations:  $0.4 \text{ rad/s} \leq \omega_R \leq 0.8 \text{ rad/s}$ , with  $\omega_R$  the rotor speed. Draw the optimal rotor speed curve as a function of wind speed  $v_w$  over the different operating regions in the plot below.

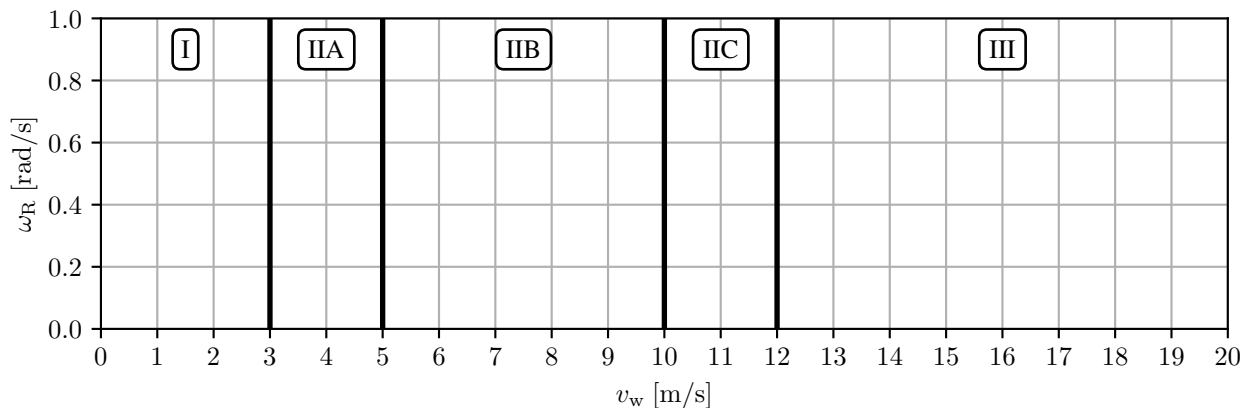

2	
---	--

9. How does the choice of estimation horizon length influence the performance of an MHE observer?

2	
---	--

10. Regard an MPC optimization problem for  $N = 10$  steps of the discrete-time system  $x_{k+1} = 2x_k + u_k$  with continuous state  $x_k \in \mathbb{R}$  and continuous bounded control action  $u_k \in [-1, 1]$ . The stage cost is given by  $l(x_k, u_k) = x_k^2$  and the terminal cost by  $E(x_N) = 100x_N^2$ . The initial state is  $\bar{x}_0$ . To which optimization problem class does the problem belong?

(a) <input type="checkbox"/> Mixed Integer Programming (MIP) but not LP	(b) <input type="checkbox"/> Quadratic Programming (QP) but not LP
(c) <input type="checkbox"/> Nonlinear Programming (NLP) but not QP	(d) <input type="checkbox"/> Linear Programming (LP)
1	

11. Regard an MPC optimization problem for  $N = 10$  steps of the discrete time system  $x_{k+1} = 2x_k + u_k$  with continuous state  $x_k \in \mathbb{R}$  and continuous bounded control action  $u_k \in [-1, 1]$ . The stage cost is given by  $l(x_k, u_k) = u_k^4$  and the terminal cost by  $E(x_k) = 100x_k^2$ . The initial state is  $\bar{x}_0$ . To which optimization problem class does the problem belong?

(a) <input type="checkbox"/> Nonlinear Programming (NLP) but not convex	(b) <input type="checkbox"/> Convex Optimization but not QP
(c) <input type="checkbox"/> Linear Programming (LP)	(d) <input type="checkbox"/> Quadratic Programming (QP) but not LP
1	

12. We want to apply the explicit Euler integration rule to the scalar differential equation  $\dot{x} = \lambda x$  on a time grid  $t_k = hk$  with time step  $h > 0$ . Which formula relates the state  $x_{k+1}$  at time  $t_{k+1}$  to the state  $x_k$  at  $t_k$ ?

(a) <input type="checkbox"/> $x_{k+1} - x_k = \frac{\lambda}{2}(x_k + x_{k+1})$	(b) <input type="checkbox"/> $x_{k+1} - x_k = \lambda x_{k+1}$
(c) <input type="checkbox"/> $x_{k+1} - x_k = h\lambda x_k$	(d) <input type="checkbox"/> $x_{k+1} - x_k = h\lambda x_{k+1}$
1	

13. When is condensing most advantageous for solving the QP arising from linear MPC problems?

(a) <input type="checkbox"/> for long horizons and many controls	(b) <input type="checkbox"/> for unstable systems
(c) <input type="checkbox"/> for short horizons and more states than controls	(d) <input type="checkbox"/> for non-convex QPs
1	

14. How many optimization variables does the NLP arising in the direct multiple shooting method have, if the system has  $n_x$  states,  $n_u$  controls, the initial value is fixed, and the time horizon is divided into  $N$  control intervals (piecewise-constant)?

(a) <input type="checkbox"/> $Nn_x^3 + Nn_u^2$	(b) <input type="checkbox"/> $\frac{1}{3}N^3n_u^3$	(c) <input type="checkbox"/> $(N+1)n_x + Nn_u$	(d) <input type="checkbox"/> $Nn_u$
1			

15. Which of the following statements on the sequential (single shooting) vs the simultaneous (multiple shooting) formulation of an Optimal Control Problem is wrong?

(a) <input type="checkbox"/> The simultaneous formulation has an exploitable sparsity structure.	(b) <input type="checkbox"/> The sequential formulation has less optimization variables.
(c) <input type="checkbox"/> The simultaneous formulation is usually better at handling unstable nonlinear systems.	(d) <input type="checkbox"/> The sequential formulation is always cheaper to solve.
1	

16. Consider a discrete-time linear system with the state-space representation:  $x_{k+1} = Ax_k + Bu_k$ . The control goal is to minimize the cost function

$$J = \sum_{k=0}^{\infty} x_k^\top Q x_k + u_k^\top R u_k.$$

online for a given initial state  $\bar{x}_0$ . Give the control law  $\kappa(\bar{x}_0)$  that minimizes the cost function and explain how it is computed. What is the name of this particular MPC problem formulation?

3

17. Consider the following system matrices of a building heating system.

$$A = \begin{bmatrix} (-H_{\text{rad,con}} - H_{\text{ve,tr}})/C_{\text{bldg}} & H_{\text{rad,con}}/C_{\text{bldg}} \\ H_{\text{rad,con}}/C_{\text{water}} & -H_{\text{rad,con}}/C_{\text{water}} \end{bmatrix}, \quad B = \begin{bmatrix} 0 \\ \frac{1}{C_{\text{water}}} \end{bmatrix}$$

Is this system given by the matrices  $A$  and  $B$  controllable? Either make the necessary calculations or give an argumentation.

Is the system observable for  $C = [0 \quad 1]$ ?

You can use the following values for the building parameters.

$C_{\text{water}}$	$H_{\text{ve,tr}}$	$H_{\text{rad,con}}$	$C_{\text{bldg}}$
80	396	661	1000

You can round the values to one decimal place.

*Note: The definitions of the observability and controllability matrices are the same for continuous-time and discrete-time linear systems.*

3	
---	--

18. Terminal constraints are typical ingredients of MPC problems. Describe (a) how you would design a terminal constraint in linear MPC to maximize the feasible set  $\mathcal{X}_N$  and (b) the contribution of the terminal constraint to recursive feasibility and closed-loop stability respectively.

3	
---	--

19. The state dynamics of an LTI system are given by the state equation  $\dot{x} = Ax + Bu$ , with  $x \in \mathbb{R}^2$ ,  $u \in \mathbb{R}^2$ , and

$$A = \begin{bmatrix} 0 & -1 \\ 1 & 1 \end{bmatrix}, \quad B = \begin{bmatrix} 1 & 0 \\ -1 & 1 \end{bmatrix}. \quad (1)$$

Compute the controllability matrix for this system. Is the system controllable?

*Note: The definition of controllability matrix is the same for continuous-time and discrete-time linear systems.*

2	
---	--

20. Rewrite the following MPC problem using soft constraints on the state constraint. Choose a penalty function that does not change the location of the solution.

$$\begin{aligned} & \underset{x(\cdot), u(\cdot)}{\text{minimize}} && \int_0^{t_f} L(x(t), u(t)) dt \\ & \text{subject to} && x(0) = \hat{x}_0, \\ & && \dot{x} = f(x(t), u(t)) \quad \forall t \in [0, t_f], \\ & && u_{\min} \leq u(t) \leq u_{\max} \quad \forall t \in [0, t_f], \\ & && x_{\min} \leq x(t) \leq x_{\max} \quad \forall t \in [0, t_f] \end{aligned}$$

2	
---	--

21. How does the Kalman Filter work, and what are its fundamental principles regarding the prediction and update step?

2	
---	--

22. Define Moving Horizon Estimation (MHE) and compare it with the Kalman Filter. Does MHE have an advantage compared to Kalman filter for state estimation of linear systems? What advantages does MHE offer in state estimation for nonlinear systems?

3	
---	--

23. Consider the following finite-horizon LQR problem with horizon  $N = 1$ :

$$\begin{aligned} & \underset{x_0, u_0, x_1}{\text{minimize}} && \frac{1}{2} x_1^\top P_N x_1 + \frac{1}{2} x_0^\top Q x_0 + u_0^\top R u_0 \\ & \text{subject to} && x_0 = \hat{x}_0, \\ & && x_1 = A x_0 + B u_0, \end{aligned}$$

Eliminate the state variables  $x_0$  and  $x_1$  from the optimal control problem. What is the cost function of the resulting equivalent problem?

1	
---	--

24. Consider the following dense linear MPC problem with horizon  $N = 1$ . There is a single inequality constraint, i.e.  $C \in \mathbb{R}^{1 \times n_u}, D \in \mathbb{R}^{1 \times n_x}, e \in \mathbb{R}$ :

$$\begin{aligned} & \underset{u_0}{\text{minimize}} && \frac{1}{2} u_0^\top \hat{R} u_0 + u_0^\top \hat{Q} \hat{x}_0 \\ & \text{subject to} && C u_0 + D \hat{x}_0 + e \geq 0, \end{aligned}$$

Derive the optimal feedback law  $\kappa(x) = Kx + v$  for the case that the inequality constraint is *strictly active*.

4	
---	--

Empty page for calculations